

MasoSine Process Pumps
Telephone: +49 (0) 7062 95600
Fax: +49 (0) 7062 64593
E-Mail: info@masosine.de
www.masosine.de

The information contained in this document is believed to be correct, but the Watson-Marlow Fluid Technology Group accepts no liability of any errors it contains and reserves the right to alter specifications without notice.

Members of the Spirax Sarco Engineering Group



Fluid Technology Group

	SPS 600L	MR160
max. pressure 	145 PSI 10 bar	145 PSI 10 bar
max. speed	600 rpm	600 rpm
temp. 	-4F -20°C +212 F +100°C	-4F -20°C +212 F +100°C
ambient temp. 	+10.5 F -12°C +104 F +40°C	+10.5 F -12°C +104 F +40°C
Weight 	727 lb 330 kg	727 lb 330 kg

CE 2006/42/EC
DIN 12100,1-2
97/23/EG
DIN 60204-1

Ewald Warmuth
Ewald Warmuth
General Manager



<70dBA@1m




Quick Start Guide MasoSine Pumps

SPS 600 L / MR 160




Innovation in Full Flow

www.masosine.com

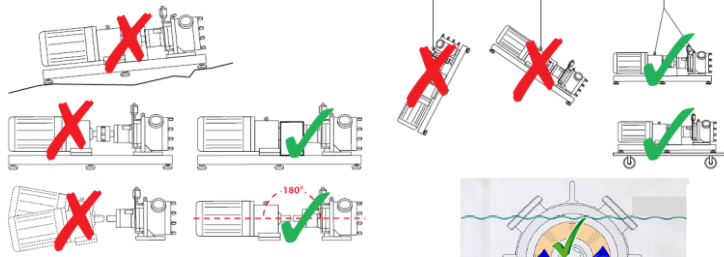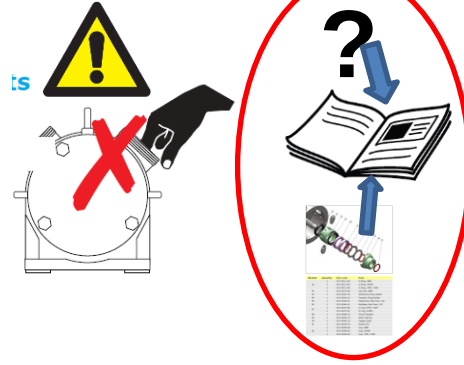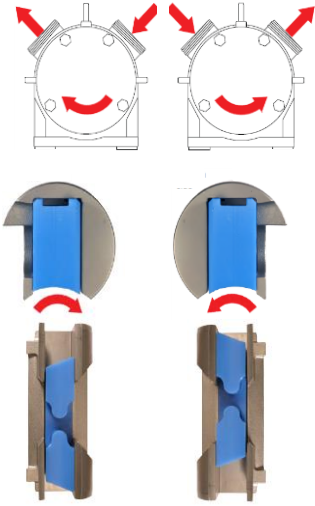

masosine
Process Pumps



masosine
Process Pumps

