

MasoSine Process Pumps
Telephone: +49 (0) 7062 95600
Fax: +49 (0) 7062 64593
E-Mail: info@masosine.de
www.masosine.de

The information contained in this document is believed to be correct, but the Watson-Marlow Fluid Technology Group accepts no liability of any errors it contains and reserves the right to alter specifications without notice.

Members of the Spirax Sarco Engineering Group



Fluid Technology Group

	SPS 100	SPS 200	SPS 250	SPS 300	SPS 400	SPS 500
max. pressure 	145 PSI 10 bar	145 PSI 10 bar	217 PSI 15 bar	217 PSI 15 bar	217 PSI 15 bar	217 PSI 15 bar
max. speed 	1.000 rpm	1.000 rpm	800 rpm	600 rpm	600 rpm	600 rpm
temp. 	-4F -20°C +212 F +100°C	-4F -20°C +212 F +100°C	-4F -20°C +212 F +100°C	-4F -20°C +212 F +100°C	-4F -20°C +212 F +100°C	-4F -20°C +212 F +100°C
ambient temp. 	+10.5 F -12°C +104 F +40°C	+10.5 F -12°C +104 F +40°C	+10.5 F -12°C +104 F +40°C	+10.5 F -12°C +104 F +40°C	+10.5 F -12°C +104 F +40°C	+10.5 F -12°C +104 F +40°C
Weight 	----- 37 lb 17,0 kg	50 lb 23,0 kg 44 lb 20,0 kg	----- 86 lb 39,0 kg	176 lb 80,0 kg 149 lb 68,0 kg	352 lb 160 kg 275 lb 125,0	----- 377 lb 171,0

CE 2006/42/EC
DIN 12100,1-2
97/23/EG
DIN 60204-1

Ewald Warmuth
Ewald Warmuth
General Manager



<70dBA@1m









Quick Start Guide MasoSine Pumps

SPS 100 / SPS 200 / SPS 250 / SPS 300 / SPS 400 / SPS 500



Innovation in Full Flow

www.masosine.com

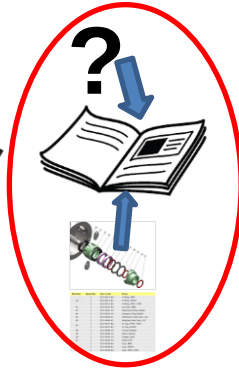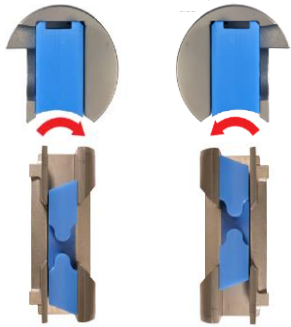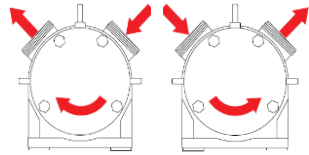

masosine
Process Pumps



masosine
Process Pumps

